


CAPIOX® FX05 Oxygenator

Pediatric oxygenator with integrated arterial filter



**With
integrated
filter!**

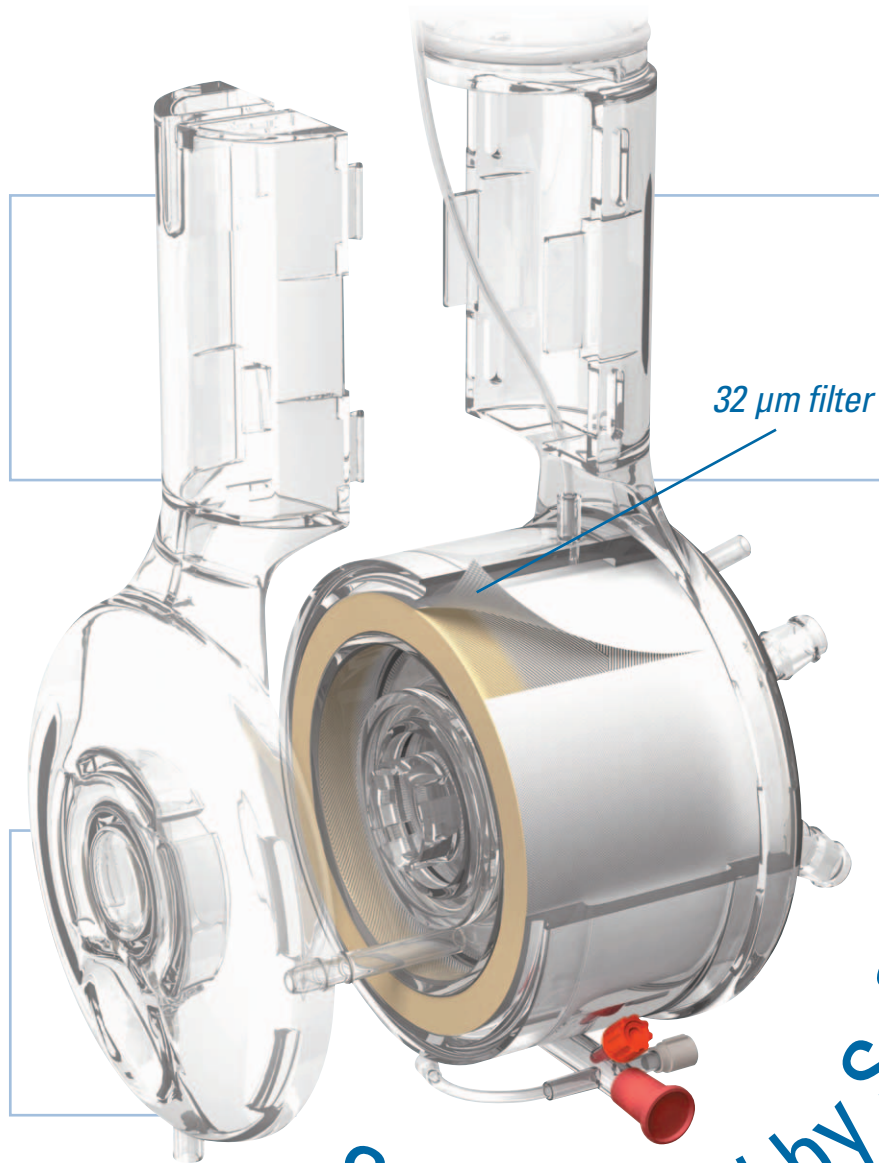

Surrounded by Safety

CAPIOX® FX05 Oxygenator

The world's first pediatric oxygenator with integrated arterial filter

- Added safety without additional prime volume
- Reduced surface area and lower pressure drop*
- Superb gas exchange
- Self-venting technology for easy set up and priming

* Compared to CAPIOX® RX05 Oxygenator and CAPIOX® AF02 arterial filter

CAPIOX® FX05 Oxygenator

Oxygenator

Proven performance

The CAPIOX® FX05 Oxygenator combines the design and performance characteristics of the world's leading pediatric oxygenator, the CAPIOX® Baby RX™ Oxygenator with the added safety of an integrated arterial filter.


High flow with very low priming volume

The CAPIOX® FX05 Oxygenator has a priming volume of 43 mL and a maximum blood flow of 1,5 L/min making it optimal for neonates and infants. The priming volume is the lowest of all oxygenator and arterial filter combinations on the market today.


Hardshell Reservoir

Proven quality, optimal visibility


- Stable blood level, even at minimal volumes
- High-visibility scale level
- Rotating connection ring for easy set up

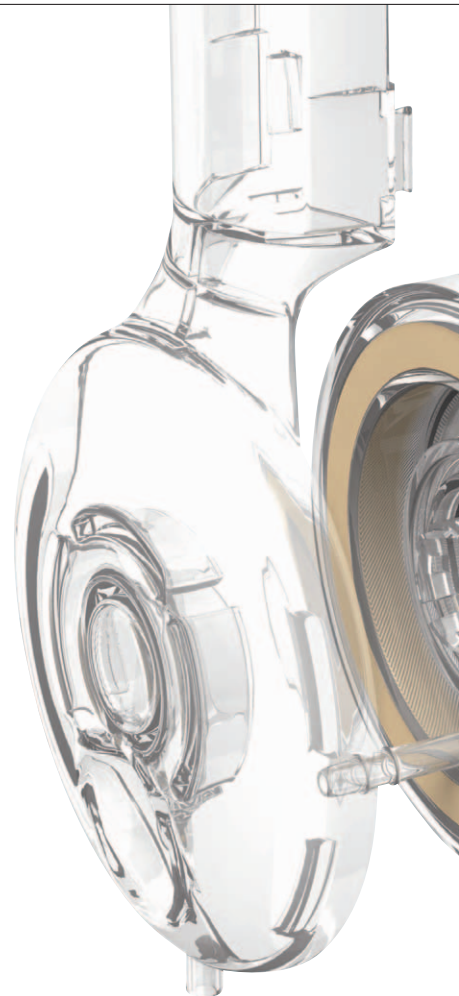


Performance Data

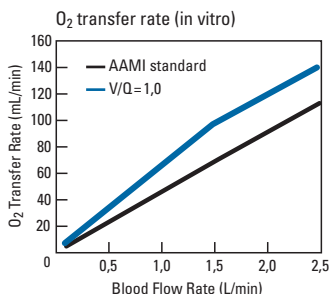


Conditions
 Blood = Bovine blood SvO₂ = 65 ± 5%
 Hb = 12 ± 1g/dL PvCO₂ = 45 ± 5 mmHg
 Temp = 37 ± 1°C B.E. = 0 ± 5 mEq/L
 pH = 7,4

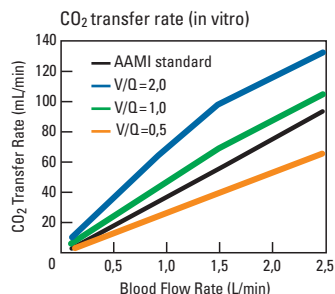

Conditions
 Blood = Bovine blood SvO₂ = 65 ± 5%
 Hb = 12 ± 1g/dL PvCO₂ = 45 ± 5 mmHg
 Temp = 37 ± 1°C B.E. = 0 ± 5 mEq/L
 pH = 7,4

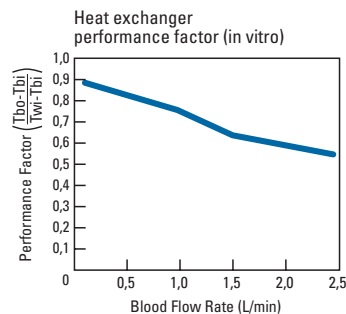



Conditions
 Blood = Bovine blood Tbi = 30 ± 1°C
 Hb = 12 ± 1g/dL Twi = 40 ± 1°C
 Water Flow Rate = 15 L/min

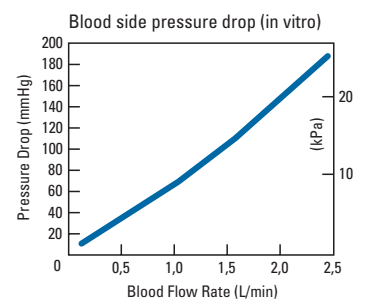

Conditions
 Blood = Bovine blood
 Hb = 12 ± 1g/dL
 Temp = 37 ± 1°C


Integrated arterial filter with self-venting technology

A 32 μm screen filter surrounds the fiber layer of the oxygenator. Particulate micro-emboli that may be present in the blood are trapped in the filter mesh while gaseous emboli remain inside the oxygenator and in contact with the hollow fibers. Driven by the pressure difference, gaseous emboli enter the inner lumen of the microporous hollow fiber and are eliminated via the gas outlet.

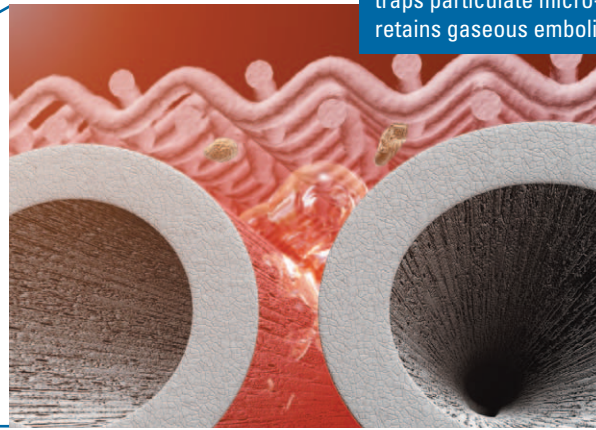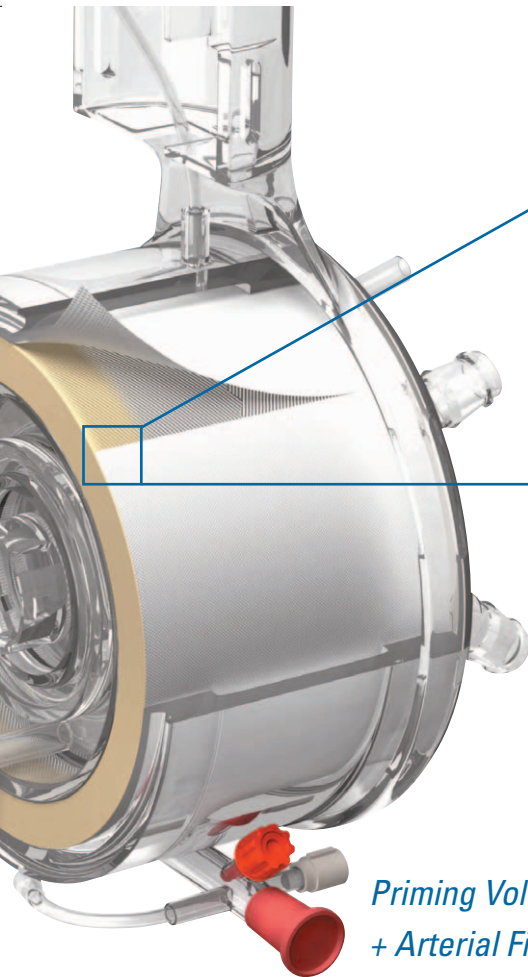

Screen filter surrounds the fiber layer, traps particulate micro-emboli and retains gaseous emboli.

Driven by the pressure difference between the blood side and gas side of the oxygenator, gaseous emboli enter the inner lumen of the microporous hollow fiber and are eliminated via the gas outlet.

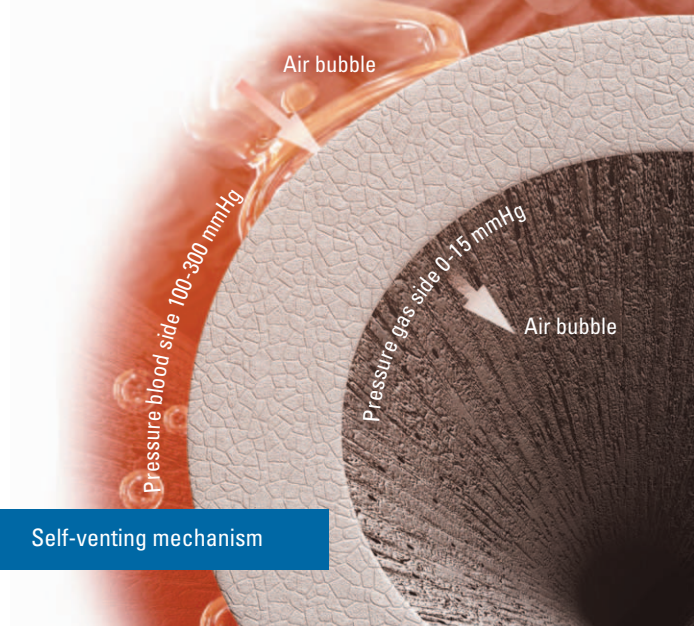

Priming Volume Oxygenator
+ Arterial Filter **43 mL**

Filter Pore Size **32 μm**

Self-venting mechanism

**OXYGENATOR WITH INTEGRATED ARTERIAL FILTER
OXYGENATOR**

Housing	Material	Polycarbonate
Fiber	Material	Microporous Polypropylene
	Surface area	Approx. 0.5 m ²
Heat exchanger	Material	Stainless steel
	Surface area	Approx. 0.035 m ²
Maximum blood flow rate		1.5 L/min
Minimum blood flow rate		0.1 L/min
Reference blood flow (AAMI standard)		2.5 L/min
Priming volume (Static)		43 mL
Blood inlet port (from pump)		1/4" (6.4 mm)
Blood outlet port		1/4" (6.4 mm)
Luer port (for recirculation or blood cardioplegia)		One luer lock on blood outlet port
Gas inlet port		1/4" (6.4 mm)
Gas outlet port		5/16" (7.9 mm)
Water ports		1/2" (12.7 mm) Hansen quick connect fittings
Maximum pressure	Blood inlet	1000 mmHg (133 kPa)
	Water inlet	2 kgf/cm ² (196 kPa) (28.5 psi)

ARTERIAL FILTER

Material	Polyster screen type
Pore size	32 µm
Surface area	130 cm ²

Note: The oxygenator module of the oxygenator/hardshell reservoir system is rotatable and detachable

HARDSHELL RESERVOIR

Housing	Material	Polycarbonate
Maximum blood flow rate		1.5 L/min
Minimum blood flow rate		0.1 L/min
Blood storage capacity		1000 mL
Minimum operating volume		15 mL
Venous filter	Material	Polyster screen type
	Pore size	47 µm
Cardiotomy filter	Material	Polyster depth type
Defoaming part	Material	Polyurethane foam
Venous blood inlet port		1/4" (6.4 mm) rotatable
Blood outlet port (to pump)		1/4" (6.4 mm)
Suction ports		Five 3/16" - 1/4" (4.8 mm - 6.4 mm) rotatable
Quick prime port		1/4" (6.4 mm)
Vent port		1/4" (6.4 mm)
Auxiliary port		1/4" - 3/8" (6.4 mm - 9.5 mm)
Luer ports		Three filtered luer locks to cardiotomy filter One non-filtered luer lock Two luer locks on venous inlet
Maximum sustainable negative pressure in reservoir		-150 mmHg (-20.0 kPa)

DESCRIPTION

CAPIOX® FX05 Oxygenator

Oxygenator with integrated arterial filter ¹ and hardshell reservoir	CX*FX05RW	4
Oxygenator with integrated arterial filter ² and hardshell reservoir.....	CX*FX05RE	4
Oxygenator with integrated arterial filter ¹	CX*FX05W	4
Oxygenator with integrated arterial filter ²	CX*FX05E	4

1 Oxygenator blood inlet on right when blood outlet is facing away from user

2 Oxygenator blood inlet on left when blood outlet is facing away from user

Accessories for CAPIOX® FX05 Oxygenator

Holder for FX05 oxygenator with hardshell reservoir.....	XX*CXH05R	1
Holder for FX05 oxygenator	XX*CXH05	1
FX05 Adapter for SX holder	XX*CXH05AD	1

CAPIOX® FX05 Oxygenator

Pediatric oxygenator with integrated arterial filter

HOLDER SYSTEMS



Terumo® and CAPIOX® are registered trademarks of Terumo Corporation. XCoating™ is a trademark of Terumo Corporation.
© 2008 Terumo Europe Cardiovascular Systems. Printed in Germany.

**TERUMO CARDIOVASCULAR
SYSTEMS INCORPORATION**
6200 Jackson Road
Ann Arbor, Michigan 48103-9300
USA
734 663 4145 phone
734 663 7981 fax
800 521 2818 toll free
www.terumo-cvs.com

TERUMO EUROPE N.V.
Interleuvenlaan 40
B-3001 Leuven
Belgium
32 16 38 12 11 phone
32 16 40 02 49 fax
www.terumo-europe.com

TERUMO EUROPE N.V.
Cardiovascular Division
Hauptstrasse 87
D-65760 Eschborn
Germany
49 6196 8023 500 phone
49 6196 8023 555 fax
www.terumo-europe.com

**TERUMO LATIN AMERICA
CORPORATION**
8750 NW 36th Street, Suite 600
Miami, Florida 33178
USA
305 477 4822 phone
305 477 4872 fax
800 283 7866 toll free

TERUMO CORPORATION
44-1, 2-chome
Hatagaya, Shibuya-ku
Tokyo 151-0072
Japan
81 3 3374 8111 phone
81 3 3374 8196 fax
www.terumo.com